



Operational Wind Load Rated

Dynamic 110



An operational wind load of 110 mph combined with the durability of a McKeon wide span opening protective door assembly makes this product an ideal solution in any environment. Tested and certified for door assemblies up to 30 feet wide with a wind load introduced and maintained over the duration of a complete opening and closing cycle. Ensured operation during sustained wind loads offers the end user the flexibility to use these door assemblies in virtually any structure in any application. Guarantee consistent work schedules and protect building contents without compromising occupant safety.

Dynamic 110 | Operational Wind Load Rated Door



Dynamic 110: Main Components

- 1 Hood
- 2 Motor Operator
- 3 Curtain Slats
- 4 Side Guide Assembly
- 5 Bottom Bar Assembly

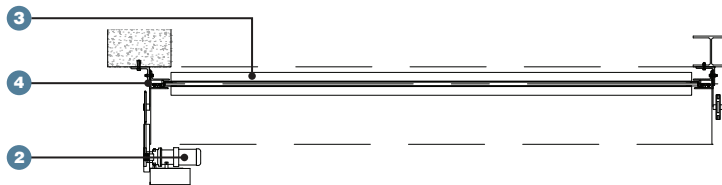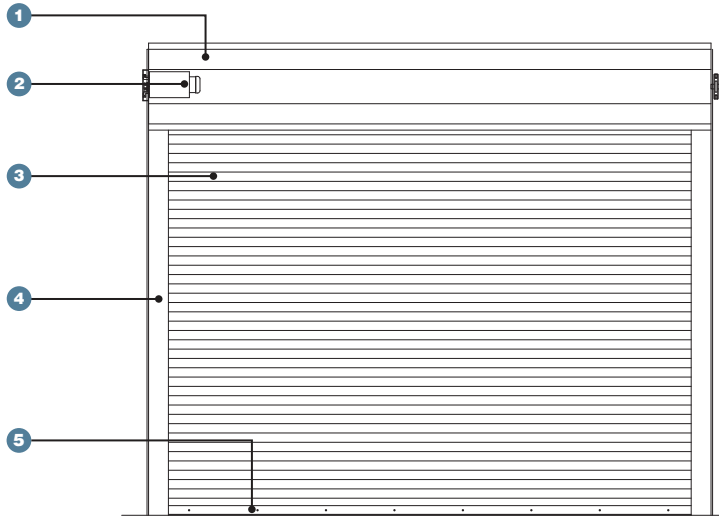

Product Features

Ratings

Operational wind load of 110 mph

Dynamic 110F available with up to a 3-hour UL10B fire rating and UL1784 smoke rating when required*

Code Compliance

CCRR-1086 applicable to Dynamic 110F

Operation

Power motor operation

Size

Unlimited heights and widths to 30'

Finishes

McKeon sterling gray

Powder coat

Stainless steel

*Listed under the Canadian equivalent CAN/ULC S104

MODEL	OPEN/CLOSE	FUNCTION
Dynamic 110	Power Operator	Vertical coiling door – Certified to an operational wind load of 110 mph for use in extreme wind force conditions

This product has patents pending.